


AQUA ENERGY

RV 8-28 HOSE RETAINING DEVICE FOR SAFELY CLEANING HEAT EXCHANGER TUBES

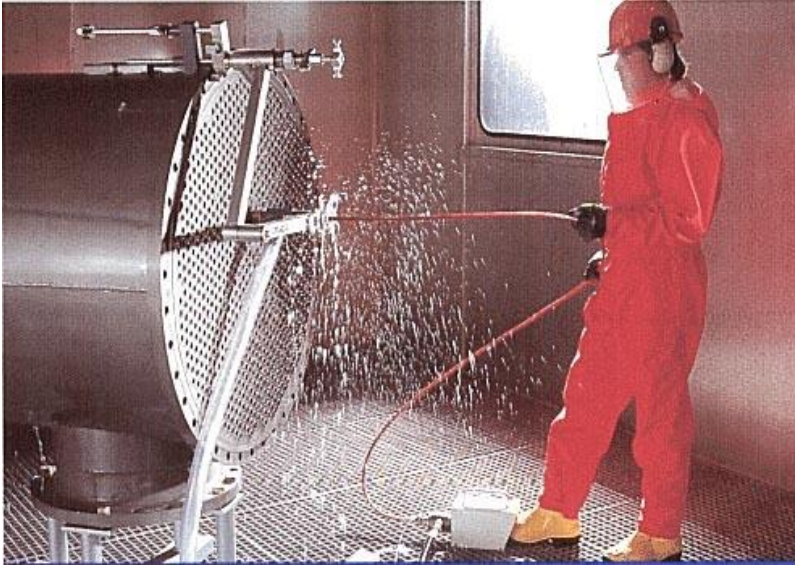


The multiple programme completes the RV 8-28:

- Flexible lances to 2,800 bar
- Rigid Lances to 2,800 bar
- Suitable rigid and rotating pipe cleaning nozzles.
- Foot Control Valve / Gun
- Protective clothing to 2,000 bar
- Safety boots to 3,000 bar

Field of application

- Internal cleaning of pipes / heat exchangers, especially with flexible lances / spirals
- In two directions x/y free moving, exact positioning and fixing over the work area, distance: 0-900 mm.
- Safety device for the cleaning tool preventing unintended and dangerous exit of nozzles from the pipe / tube pipe.
- Quick and easy clamping or tightening of the device to the heat exchanger flange.
- Incorporated drain for discharge water to protect the service operator.

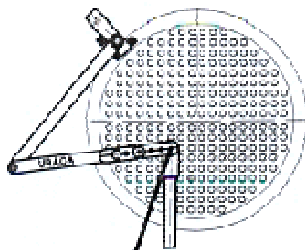

Adjustable device which can be fixed on the heat exchanger with or without bore holes.

Technical data	: RV 8-28
Pressure range	: Depending on lance
Adjustable lance dia	: 8,5-28mm
Operating temperature	: Max 70°C
Work radius	: 475mm
Weight	: 14Kg

Aqua Energy International Limited, St James Business Centre, Linwood Road
Paisley PA3 3AT, Scotland, UK

Tel: +44 (0) 141 849 6888 Fax: +44 (0) 141 848 5777

E-mail: info@aquaenergy.com www.aquaenergy.com

AQUA ENERGY

FLEXIBLE LANCE "SAFETY GUARD" FOR HEAT EXCHANGER TUBE CLEANING



Assy. #77209001
Complete Guard Assy.,
Standard

Assy. #77209036
Complete Guard Assy., Large

The Flexible Lance Safety Guard - Easy Installation of Lance Stop




Standard Diffuser #77209010



Large Diffuser #77209013



LANCE STOP DIAMETER	PART NO.
0.323 INCHES	77209002
0.442 INCHES	77209003
0.510 INCHES	77209004

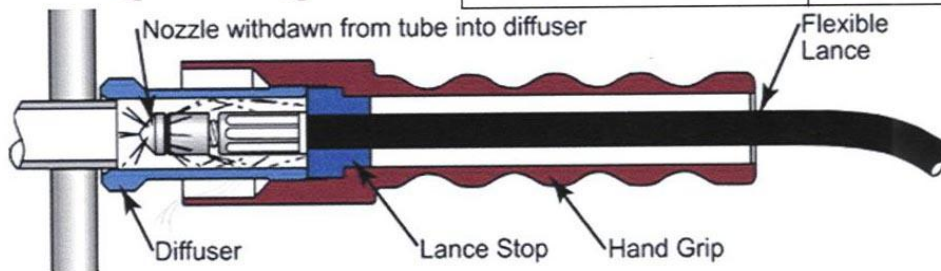

The **Flexible Lance Safety Guard** reduces the danger from a live nozzle (i.e. pressurised) while it is being withdrawn from a Heat Exchanger tube. This minimises the risk of operator injury resulting from a live nozzle exiting a tube unexpectedly. The nozzle cannot be pulled out of the **Flexible Lance Safety Guard** thereby protecting the operator from high pressure spray. Three sizes of lance stop are provided with each complete assembly.

Aqua Energy International Limited, St James Business Centre, Linwood Road
Paisley PA3 3AT, Scotland, UK

Tel: +44 (0) 141 849 6888 Fax: +44 (0) 141 848 5777

E-mail: info@aquaenergy.com www.aquaenergy.com